
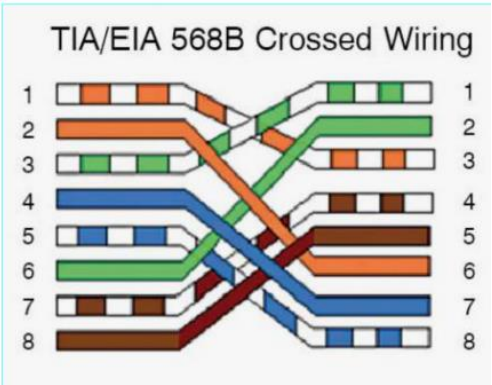


4	Rubber	305000000005	PVC material, Color: black 45P	/	9			
3	Rubber	305000000003	PE material Color: transparent	/	9			
2	Wire	301000000274	UL2464 26AWG*4P (Blue/White-blue,Orange/White-orange, Green/White-green,Brown/White-brown) ID:0.95 Core material:PP OD:5.5 Outer cover:Black cold resistant Anti-UV PVC	260*1	PCS	14-14		
1	Plug	304000000130	Crystal head 8P8C Aperture 1.0 Gold plating 1.0 U	2	PCS			
No	Name	Model	Description	Quantity	Unit			
List of materials								

Mold No.:
Interior design: ZBTZS-0122
External design: ZBT-ZS-0123

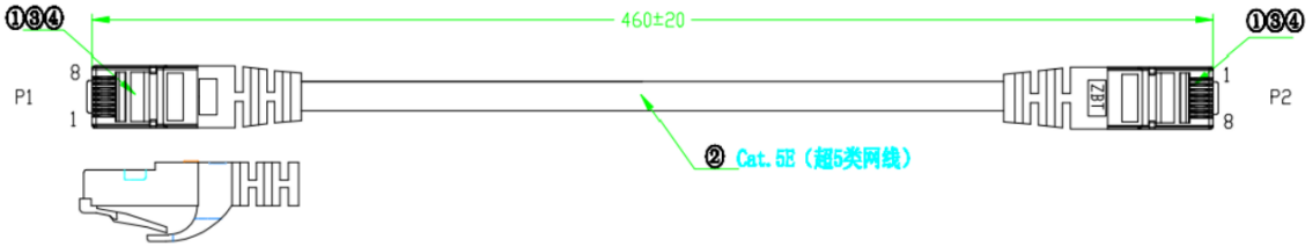

© All rights reserved, no unauthorized copying without written consent
1.Cut the number and directly measure the drawing to take the number ;
2.All sizes are in mm ;
3.Unmarked dimensional tolerances refer to national standard tolerance requirements

Color	0	Connection method	P2	Remark
White/Orange	1		3	
Orange	2		6	
Blue	3		7	
White-blue	4		8	
White-green	5		1	
Green	6		2	
White-brown	7		4	
Brown	8		5	

Technical requirements:

- 100% electrical test of finished products, no open circuit, short circuit, wrong line, poor contact;
- Test conditions: insulation impedance: >5MN,conduction impedance: <39,high voltage test: DC 300V 10ms
- The outer sheath of the wire cannot be damaged, dirty, and the wire core cannot have broken strands, etc.
- The terminal crimping is good and reliable, and the copper wire must not be exposed, etc.
- All materials comply with the EU RoHS directive
- Working temperature: -40°C-85°C

	Version	Remarks	Date	Model: E300 network cable (double cross)	PN:
	A				
					Weight:
					Proportion: 1:1
Dimensions Error: X±03 .XX±0.1 X±05	Designer	Ji Chen		SED Technology Building, 1 Technology Road, Shenzhen, China Tel: +86-755-86316570 Web: www.sedinitta.com	Total: 1 pc
New Version: A					